


# SOUND PROJECTS

## DreamLine™

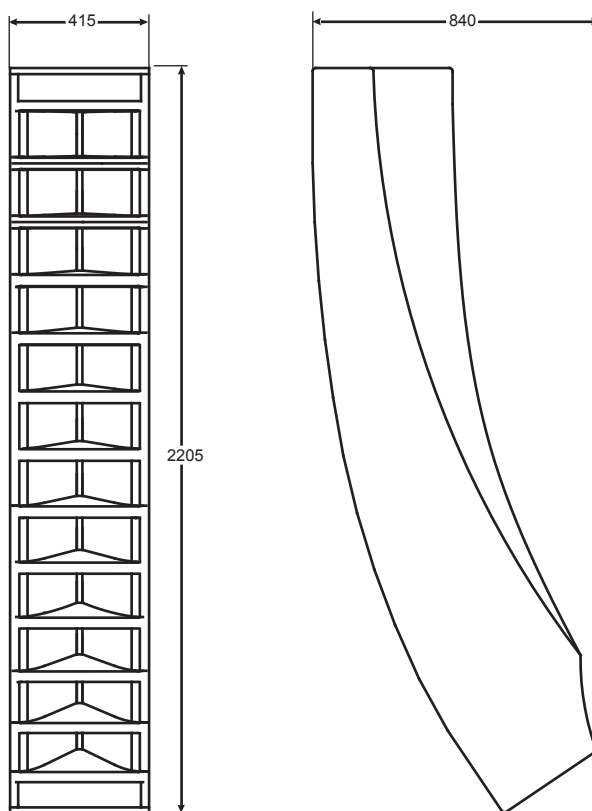

Symmetrical Single Box Line Array Systems					
System	DreamLine Light	DreamLine Touring	DreamLine Fixed	DreamLine High Power	BassLine
Frequency response	35Hz-20kHz	35Hz-20kHz	35Hz-20kHz	35Hz-20kHz	60-90/140Hz
Maximum peak SPL (calc.@ 1m)	132 dB	138 dB	138 dB	144 dB	136 dB
Coverage (-6 dB points)	90 H x 40 V	90 H x 40 V	90 H x 40 V	90 H x 40 V	omni-directional
Amplifier power	4 x Micro AMP*	4 x Micro AMP*	4 x Micro AMP*	2 x Micro AMP* + 2 x classD**	3 x Micro AMP*
Transducers	24x6.5" / 12x1"	24x6.5" / 12x1"	24x6.5" / 12x1"	24x6.5" / 12x1"	6x12"
Weight	125 kg	120 kg	122 kg	130 kg	105 kg

\* 600W @ 4ohm \*\* Class D AMP 1600W @ 4ohm

Connectors  
2 x Neutrik XLR - daisy chained  
2 x Neutrik Powercon

Enclosure Material  
Polymer coated multi-layer  
crossgrain Plywood

Grille  
Powder coated steel grill

IP rating  
IP 34 (others on request)